




<http://www.apache.org/> 

Apache Felix Karaf Users' Guide

Copyright 2009 The Apache Software Foundation

Table of contents


- 1. Overview
- 2. Quick start
- 2.1. Quick Start (Source)
- 3. Installation
- 4. Understanding Karaf
- 4.1. Console and Commands
- 4.2. Remote Console
- 4.3. Logging system
- 4.4. Deployer
- 4.5. Security framework
- 4.6. Provisioning
- 4.7. Administration
- 4.8. Configuration
- 5. Using Karaf
- 5.1. Troubleshooting, Debugging and Profiling
- 5.2. Developing applications
- 5.3. Creating bundles for third party dependencies
- 6. Advanced uses
- 6.1. Extending the console
- 6.2. Building custom distributions
- 6.3. Programmatically connect to the console
- 6.4. Embedding Karaf
- 6.5. Deploying security providers
- 6.6. Installing additional features
- 6.7. Configuring Failover Deployments
- 7. Optional Features
- 7.1. Enabling Colorized Console Output On Windows

I. Overview

Apache Felix Karaf is a small OSGi based runtime which provides a lightweight container onto which various components and applications can be deployed.

Here is a short list of features supported by the Karaf:

- **Hot deployment:** Karaf supports hot deployment of OSGi bundles by monitoring jar files inside the `[home]/deploy` directory. Each time a jar is copied in this folder, it will be installed inside the runtime. You can then update or delete it and changes will be handled automatically. In addition, the Karaf also supports exploded bundles and custom deployers (blueprint and spring ones are included by default).
- **Dynamic configuration:** Services are usually configured through the ConfigurationAdmin OSGi service. Such configuration can be defined in Karaf using property files inside the `[home]/etc` directory. These configurations are monitored and changes on the properties files will be propagated to the services.
- **Logging System:** using a centralized logging back end supported by Log4J, Karaf supports a number of different APIs (JDK 1.4, JCL, SLF4J, Avalon, Tomcat, OSGi)
- **Provisioning:** Provisioning of libraries or applications can be done through a number of different ways, by which they will be downloaded locally, installed and started.
- **Native OS integration:** Karaf can be integrated into your own Operating System as a service so that the lifecycle will be bound to your Operating System.
- **Extensible Shell console:** Karaf features a nice text console where you can manage the services, install new applications or libraries and manage their state. This shell is easily extensible by deploying new commands dynamically along with new features or applications.
- **Remote access:** use any SSH client to connect to Karaf and issue commands in the console
- **Security framework** based on JAAS
- **Managing instances:** Karaf provides simple commands for managing multiple instances. You can easily create, delete, start and stop instances of Karaf through the console.
- Supports the latest OSGi 4.2 containers: Apache Felix Framework 2.0.0 and Eclipse Equinox 3.5

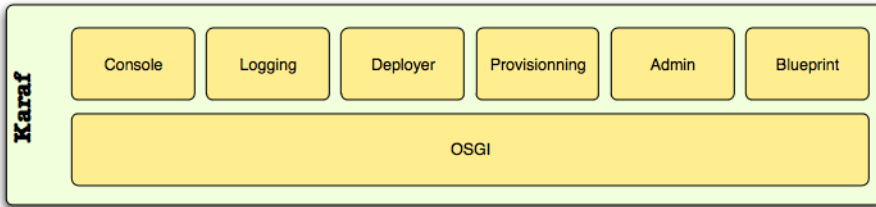

2. Quick start

If you are in a hurry to have Apache Felix Karaf up and running right away, this section will provide you with some basic steps for downloading, building (when needed) and running the server in no time. This is clearly not a complete guide so you may want to check other sections of this guide for further information.

All you need is 5 to 10 minutes and to follow these basic steps.

- Background
- Getting the software
- Start the server
- Deploy a sample application

BACKGROUND

Apache Felix Karaf is a small and lightweight OSGi based runtime. This provides a small lightweight container onto which various bundles can be deployed.

GETTING THE SOFTWARE

At this time you have one option to get the software. The fastest and easiest way is to get the binary directly from the Apache site. Since this article is intended to help you to have Apache Felix Karaf up and running in the fastest way only the binary download will be covered at this time.

Prerequisites

Although this installation path is the fastest one, still you will need to install some software before installing Karaf.

Karaf requires a Java 5 environment to run. Refer to <http://java.sun.com> for details on how to download and install J2SE 1.5 or greater.

Download binaries

Depending on the platform you plan to install and run Karaf you will select the appropriate installation image. Open a Web browser and access the following URL, there you will find the available packages for download (binaries and source code).

<http://felix.apache.org/site/downloads.cgi>



Apache Felix Karaf started life as the Apache ServiceMix kernel.
Don't be surprised by any transitional references which remain.

Select the file compression format compatible with your system (zip for windows, tar.gz for unices) by clicking directly on the link, download it and expand the binary to your hard drive in a new directory; for example in `z:\servicemix` - from now on this directory will be referenced as `<KARAF_HOME>`. Please remember the restrictions concerning illegal characters in Java paths, e.g. `!`, `%` etc.

The installation of Karaf is as simple as uncompressing the `.zip` or `.tar` files. The next step is to start the server.

START THE SERVER

With Karaf already installed, open a command line console and change directory to `<SERVICEMIX_HOME>`. To start the server, run the following command in Windows:

```
bin\karaf.bat
```

respectively on Unix:

```
bin/karaf
```

You should see the following informations on the command line console:

```

  ____  _
 / ___|| | | |
 \___ \| |_| |
  ___) | __| |
 |___)_| |_| |
      |_|_|_|

Apache Felix Karaf (1.0.0)

Hit '<tab>' for a list of available commands
and '[cmd] --help' for help on a specific command.

karaf@root>
```

You can now run your first command. Simply type the `<tab>` key in the console.

```
karaf@root>

admin:change-port      admin:connect      admin:create
```

admin:destroy	admin:list	admin:start
admin:stop	config:cancel	config:edit
config:list	config:propappend	config:propdel
config:proplist	config:propset	config:update
features:addUrl	features:install	features:list
features:listUrl	features:refreshUrl	features:removeUrl
features:uninstall	log:display	log:display-exception
log:get	log:set	osgi:bundle-level
osgi:headers	osgi:install	osgi:list
osgi:ls	osgi:refresh	osgi:resolve
osgi:restart	osgi:shutdown	osgi:start
osgi:start-level	osgi:stop	osgi:uninstall
osgi:update	packages:exports	packages:imports
shell:cat	shell:echo	shell:exec
shell:grep	shell:info	shell:java
shell:printf	shell:sleep	shell:sort
shell:tac	ssh:ssh	ssh:sshd
karaf@root>		

You can then grab more specific help for a given command using the `--help` option for this command:

```
karaf@root> admin:create --help
DESCRIPTION
    admin:create

    Create a new instance.

SYNTAX
    admin:create [options] [VAL]

ARGUMENTS
    VAL          Name of the new Karaf instance

OPTIONS
    -p, --port          Port number for remote shell connection
    --help              Display this help message
    -l, --location      Location of the new instance on the file system

karaf@root>
```

Note that the console supports tab completion, so you just need to enter `ad <tab> cr <tab>` instead of `admin:create`.

DEPLOY A SAMPLE APPLICATION

While you will learn in the remainder of this guide how to use and leverage Apache Felix Karaf, we will just use the pre-built packaging for now.

In the console, run the following commands:

```
features:install spring-dm
osgi:install -s mvn:org.apache.geronimo.specs/geronimo-activation_1.1_spec/1.0.2
osgi:install -s mvn:org.apache.servicemix.specs/
org.apache.servicemix.specs.stax-api-1.0/1.1.0
osgi:install -s mvn:org.apache.servicemix.specs/
org.apache.servicemix.specs.jaxb-api-2.1/1.1.0
osgi:install -s mvn:org.apache.servicemix.bundles/
org.apache.servicemix.bundles.jaxb-impl/2.1.6_1
osgi:install -s mvn:org.apache.camel/camel-core/1.4.0
osgi:install -s mvn:org.springframework/spring-tx/2.5.6.SEC01
osgi:install -s mvn:org.apache.camel/camel-spring/1.4.0
osgi:install -s mvn:org.apache.camel/camel-osgi/1.4.0
osgi:install -s mvn:org.apache.camel/camel-example-osgi/1.4.0
```

This commands will download, install and start the specified jars.

The example installed is using Camel to start a timer every 2 seconds and output a message on the console.

```
>>>> MyTransform set body: Wed Jan 02 23:34:19 CET 2008
>>>> MyTransform set body: Wed Jan 02 23:34:21 CET 2008
```

Stopping and uninstalling the sample application

To stop this demo, run the following command:

```
osgi:list | grep example
```

In the output, locate the line containing `camel-example-osgi` and note the id of the bundle in the first column. Then launch the following command:

```
osgi:stop [id]
```

If you wish, you can start again the sample by using the following command:

```
osgi:start [id]
```

To uninstall the demo, run the following command:

```
osgi:uninstall [id]
```

Common Problems

1. Launching Karaf can result in a deadlock in Felix during module dependency resolution. This is often a result of sending a SIGINT (control-C) to the process when it will not cleanly exit. This can corrupt the caches and cause startup problems in the very next launch. It is fixed by emptying the component cache:

```
rm -rf data/cache/*
```

STOPPING KARAF

To stop Karaf from the console, enter `^D` in the console:

```
^D
```

Alternatively, you can also run the following command:

```
osgi:shutdown
```

SUMMARY

This document showed you how simple it is to have Apache Felix Karaf up and running. The overall time for getting the server running should be less than five minutes if you have the prerequisite (Java 1.5) already installed. Additionally, this article also showed you how to deploy and test a simple Apache Camel application in less than five minutes.

2.1. Quick Start (Source)

If you are in a hurry to have Apache Felix Karaf up and running right away, this section will provide you with some basic steps for checking out, building and running the server in no time. This is clearly not a complete guide so you may want to check other sections of this guide for further information.

All you need is 15 minutes and to follow these basic steps.

- Background
- Getting the software
- Start the server
- Deploy a sample application

BACKGROUND

Apache Felix Karaf is a small and lightweight OSGi based runtime. This provides a small lightweight container onto which various bundles can be deployed.

GETTING THE SOFTWARE

This document describes how to build the server from the latest Karaf source.

Prerequisites

Although this installation path is the fastest one, still you will need to install some software before installing Karaf.

Karaf requires a Java 5 environment to run. Refer to <http://java.sun.com> for details on how to download and install J2SE 1.5 or greater.

Subversion is required to checkout the source.

Maven 2 is required to build Karaf.

Checkout Source

The Karaf source is found at <http://svn.apache.org/repos/asf/felix/trunk/karaf/>. To check out with a command line client:

```
$ svn co http://svn.apache.org/repos/asf/felix/trunk/karaf/
```



Apache Felix Karaf started life as the Apache ServiceMix kernel.
Don't be surprised by any transitional references which remain.

Build

Change directory to the top level of the source checkout. Build Karaf using Maven as follows:

```
$ mvn -Pfastinstall
```

Distributions will be created in assembly/target. Select the file compression format compatible with your system (apache-felix-karaf-1.0.0.zip for windows, apache-felix-karaf-1.0.0.tar.gz for unices) and expand the binary in a new directory; for example in z:\karaf - from now on this directory will be referenced as <KARAF_HOME>. Please remember the restrictions concerning illegal characters in Java paths, e.g. !, % etc.

The installation of Karaf is as simple as uncompressing the .zip or .tar files. The next step is to start the server.

START THE SERVER

With Karaf already installed, open a command line console and change directory to <KARAF_HOME>. To start the server, run the following command in Windows:

```
bin\karaf.bat
```

respectively on Unix:

```
bin/karaf
```

You should see the following informations on the command line console:

```

  ____  _
 / ___|| | | |
| |___| |_| |
 \___ \|  __/
      | |
      |_|

```

Apache Felix Karaf (1.0.0)

Hit '<tab>' for a list of available commands
and '[cmd] --help' for help on a specific command.

```
karaf@root>
```



To generate Eclipse projects for all modules, in KARAF_HOME type:

```
mvn -Psetup.eclipse
```

Then add each module location, prefixing each name with *org.apache.felix.karaf* (for example *org.apache.felix.karaf.shell.core*)

You can now run your first command. Simply type the <tab> key in the console.

```
karaf@root>

admin:change-port      admin:connect          admin:create
admin:destroy          admin:list             admin:start
admin:stop             config:cancel          config:edit
config:list            config:propappend      config:propdel
config:proplist        config:propset         config:update
features:addUrl         features:install       features:list
features:listUrl        features:refreshUrl    features:removeUrl
features:uninstall     log:display            log:display-exception
log:get                log:set               osgi:bundle-level
osgi:headers           osgi:install           osgi:list
osgi:ls                osgi:refresh           osgi:resolve
osgi:restart           osgi:shutdown          osgi:start
osgi:start-level       osgi:stop              osgi:uninstall
osgi:update            packages:exports       packages:imports
shell:cat              shell:echo             shell:exec
shell:grep             shell:info             shell:java
shell:printf           shell:sleep            shell:sort
shell:tac              ssh:ssh               ssh:sshd
karaf@root>
```

DEPLOY A SAMPLE APPLICATION

While you will learn in the remainder of this guide how to use and leverage Apache Felix Karaf, we will just use the pre-built packaging for now.

In the console, run the following commands:

```
features:install spring-dm
osgi:install -s mvn:org.apache.geronimo.specs/geronimo-activation_1.1_spec/1.0.2
osgi:install -s mvn:org.apache.servicemix.specs/
org.apache.servicemix.specs.stax-api-1.0/1.1.0
osgi:install -s mvn:org.apache.servicemix.specs/
org.apache.servicemix.specs.jaxb-api-2.1/1.1.0
osgi:install -s mvn:org.apache.servicemix.bundles/
org.apache.servicemix.bundles.jaxb-impl/2.1.6_1
```

```
osgi:install -s mvn:org.apache.camel/camel-core/1.4.0
osgi:install -s mvn:org.springframework/spring-tx/2.5.6.SEC01
osgi:install -s mvn:org.apache.camel/camel-spring/1.4.0
osgi:install -s mvn:org.apache.camel/camel-osgi/1.4.0
osgi:install -s mvn:org.apache.camel/camel-example-osgi/1.4.0
```

This commands will download, install and start the specified jars.

The example installed is using Camel to start a timer every 2 seconds and output a message on the console.

```
>>>> MyTransform set body: Wed Jan 02 23:34:19 CET 2008
>>>> MyTransform set body: Wed Jan 02 23:34:21 CET 2008
```

Stopping and uninstalling the sample application

To stop this demo, run the following command:

```
osgi:list | grep example
```

In the output, locate the line containing `camel-example-osgi` and note the id of the bundle in the first column. Then launch the following command:

```
osgi:stop [id]
```

If you wish, you can start again the sample by using the following command:

```
osgi:start [id]
```

To uninstall the demo, run the following command:

```
osgi:uninstall [id]
```

Common Problems

1. Launching SMX4 can result in a deadlock in Felix during module dependency resolution. This is often a result of sending a SIGINT (control-C) to the process when it will not cleanly exit. This can corrupt the caches and cause startup problems in the very next launch. It is fixed by emptying the component cache:

```
rm -rf data/cache/*
```

STOPPING KARAF

To stop Karaf from the console, enter `^D` in the console:

```
^D
```

Alternatively, you can also run the following command:

```
osgi:shutdown
```

SUMMARY

This document showed you how simple it is to have Apache Felix Karaf up and running. The overall time for getting the server running should be less than five minutes if you have the prerequisite (Java 1.5) already installed. Additionally, this article also showed you how to deploy and test a simple Apache Camel application in less than five minutes.

3. Installation

This document describes how to install and configure Apache Felix Karaf for both Unix and Windows' platforms.

Here you will find information about what are pre requisite software, where to download Karaf from and how to customize the installation to use custom ports other than the defaults.

This article contains the following sections:

- Pre-Installation Requirements
- Installation Procedure for Windows
- Windows Binary Installation
- Windows Source Installation
- Installation Procedure For Unix
- Unix Binary Installation
- Unix Source Installation
- Starting Karaf
- On Windows
- On Unix
- Testing the Installation
- Stopping Karaf

PRE-INSTALLATION REQUIREMENTS

Hardware:

- 5 MB of free disk space for the Apache Felix Karaf x.y binary distribution.
- 3 MB of free disk space for the Apache Felix Karaf x.y source distributions or SVN checkout. The Maven build requires roughly 57 MB disk space and for the dependencies Maven downloads during building further 76 MB are required. As a lot of small files are produced, the exact space demands depend greatly on your cluster utilization ratio.

Operating Systems:

- Windows: Windows XP SP2, Windows 2000.
- Unix: Ubuntu Linux, Powerdog Linux, MacOS, AIX, HP-UX, Solaris, any Unix platform that supports Java.

Environment:

- Java Developer Kit (JDK) 1.5.x or greater (<http://java.sun.com/>).
- The JAVA_HOME environment variable must be set to the directory where the JDK is installed, e.g., `c:\Program Files\jdk.1.5.0_06`. To accomplish that, press Windows key and Break key together, switch to "Advanced" tab and click on "Environment Variables". Here, check for the variable and, if necessary, add it.

- Apache Maven 2.0.8 (<http://maven.apache.org/download.html>).

INSTALLATION PROCEDURE FOR WINDOWS

This section of the Getting Started guide explains how to install binary and source distributions of Karaf on a Windows system.

Windows Binary Installation

This procedure explains how to download and install the binary distribution on a Windows system.

1. From a browser, navigate to <http://felix.apache.org/site/downloads.cgi>.
2. Scroll down to the "Apache Felix Karaf" section and select the desired distribution. For a binary distribution, the filename will be similar to: `apache-felix-karaf-x.y.zip`.
3. Extract the files from the ZIP file into a directory of your choice. Please remember the restrictions concerning illegal characters in Java paths, e.g. `!`, `%` etc.
4. Proceed to the Starting Karaf section of this document.
5. Following start-up, go to the Testing the Installation section of this document.
6. Optional: see 7.1. Enabling Colorized Console Output On Windows

Windows Source Installation

This procedure explains how to download and install the source distribution on a Windows system. **NOTE:** Karaf requires Java 5 is compile, build and run.

1. From a browser, navigate to <http://felix.apache.org/site/downloads.cgi>.
2. Scroll down to the "Apache Felix Karaf" section and select the desired distribution. For a source distribution, the filename will be similar to: `apache-felix-karaf-x.y-src.zip`.
3. Extract Karaf from the ZIP file into a directory of your choice. Please remember the restrictions concerning illegal characters in Java paths, e.g. `!`, `%` etc.
4. Build Karaf using Maven 2.0.8 or greater and Java 5.

The recommended method of building Karaf is the following:

```
cd [karaf_install_dir]\\src
```

where `[karaf_install_dir]` is the directory in which Karaf was installed.

```
mvn
```

Both steps take around 10 to 15 minutes.



Handy Hint

In case you have to install Karaf into a very deep path or a path containing illegal characters for Java paths, e.g. !, % etc., you may add a bat file to *start* -> *startup* that executes

```
subst S: "C:\your very % problematic path!\KARAF"
```

so your Karaf root directory is S: — which works for sure and is short to type.

5. Unzip the distribution using your favorite zip tool. The windows distribution is available at

```
[karaf_install_dir]\assembly\target\apache-felix-karaf-x.y.zip
```

6. Proceed to the Starting Karaf section of this document.
7. Following start-up, go to the Testing the Installation section of this document.
8. Optional: see 7.1. Enabling Colorized Console Output On Windows

INSTALLATION PROCEDURE FOR UNIX

Unix Binary Installation

This procedure explains how to download and install the binary distribution on a Unix system.

1. From a browser, navigate to <http://felix.apache.org/site/downloads.cgi>.
2. Scroll down to the "Apache Felix Karaf" section and select the desired distribution. For a binary Unix distribution, the filename will be similar to: `apache-felix-karaf-x.y.tar.gz`.
3. Extract the files from the gzip file into a directory of your choice. For example:

```
gunzip apache-felix-karaf-x.y.tar.gz
tar xvf apache-felix-karaf-x.y.tar
```

Please remember the restrictions concerning illegal characters in Java paths, e.g. !, % etc.

4. Proceed to the Starting Karaf section of this document.
5. Following start-up, go to the Testing the Installation section.

Unix Source Installation

This procedure explains how to download and install the source distribution on a Unix system. This procedure assumes the Unix machine has a browser. Please see the previous Unix Binary

Installation section for ideas on how to install Karaf without a browser. **NOTE:** Karaf requires Java 5 to compile, build and run.

1. From a browser, navigate to <http://felix.apache.org/site/downloads.cgi>.
2. Scroll down to the "Apache Felix Karaf" section and select the desired distribution.
For a source distribution, the filename will be similar to: `apache-felix-karaf-x.y-src.tar.gz`.
3. Extract the files from the ZIP file into a directory of your choice. For example:

```
gunzip apache-felix-karaf-x.y-src.tar.gz
tar xvf apache-felix-karaf-x.y-src.tar
```

Please remember the restrictions concerning illegal characters in Java paths, e.g. `!`, `%` etc.

4. Build Karaf using Maven 2.0.8 or greater and Java 5:

```
The preferred method of building Karaf is the following:
cd [karaf_install_dir]/src
  where [karaf_install_dir] is the directory in which Karaf was installed.
mvn
```

5. Uncompress the distribution that has just been created

```
cd [karaf_install_dir]/assembly/target
gunzip apache-felix-karaf-x.y.tar.gz
tar xvf apache-felix-karaf-x.y.tar
```

6. Proceed to the Starting Karaf section of this document.
7. Following start-up, go to the Testing the Installation section.

STARTING KARAF

On Windows

From a console window, change to the installation directory and run Karaf. For the binary distribution, go to

```
cd [karaf_install_dir]
```

and for the source distribution go to the target directory, for example:

```
cd [karaf_install_dir]\src\assembly\target\apache-felix-karaf-x.y-SNAPSHOT
```

where `karaf_install_dir` is the directory in which Karaf was installed, e.g., `c:\Program Files\apache-felix-karaf-x.y`.

Then type:

bin\karaf.bat

Note: Working directories get created relative to the current directory. For the working directories to be created in the proper place, Karaf must be launched from its home/installation directory.

On Unix

From a command shell, change to the installation directory and run `Karaf`. For the binary distribution, go to

```
cd [karaf_install_dir]
```

and for the source distribution go to the target directory, for example:

```
cd [karaf_install_dir]/src/assembly/target/apache-felix-karaf-x.y
```

where `karaf_install_dir` is the directory in which Karaf was installed, e.g., `/usr/local/apache-felix-karaf-x.y`.

Then type:

```
bin/karaf.sh
```

TESTING THE INSTALLATION

If Karaf is up and running without problems, the Window's console window or the Unix command shell will display something similar to the following log line:

$\overline{f_1} \overline{f_2} \overline{f_3} \overline{f_4} \overline{f_5} \overline{f_6} \overline{f_7} \overline{f_8} \overline{f_9} \overline{f_{10}}$
 $\overline{f_1} \overline{f_2} \overline{f_3} \overline{f_4} \overline{f_5} \overline{f_6} \overline{f_7} \overline{f_8} \overline{f_9} \overline{f_{10}}$
 $\overline{f_1} \overline{f_2} \overline{f_3} \overline{f_4} \overline{f_5} \overline{f_6} \overline{f_7} \overline{f_8} \overline{f_9} \overline{f_{10}}$
 $\overline{f_1} \overline{f_2} \overline{f_3} \overline{f_4} \overline{f_5} \overline{f_6} \overline{f_7} \overline{f_8} \overline{f_9} \overline{f_{10}}$

Apache Felix Karaf (1.0.0)

Hit '<tab>' for a list of available commands
and '[cmd] --help' for help on a specific command.



Warning

Do NOT close the console or shell in which Karaf was started, as that will terminate Karaf (unless Karaf was started with nohup).

```
karaf@root>
```

STOPPING KARAF

For both Windows and Unix installations, you can perform a clean shutdown of Karaf Kernel by using the following command:

```
osgi:shutdown
```

If Karaf was started in the background on Unix, the process can be killed, with the following:

```
ps -ef | grep karaf
kill [PID]
where [PID] is the process id of the Karaf process.
```

4. Understanding Karaf

- 4.1. Console and Commands
- 4.2. Remote Console
- 4.3. Logging system
- 4.4. Deployer
- 4.5. Security framework
- 4.6. Provisioning
- 4.7. Administration
- 4.8. Configuration

4.1. Console and Commands

OVERVIEW

Karaf provides a powerful console and a set of commands that can be used to perform various tasks. Commands can be located in the root shell or in a sub-shell. A sub-shell is a group of related commands, like commands related to the OSGi framework or the log system.

The following shells are available out-of-the-box, but the console can be easily extended:

- admin
- config
- features
- log
- obr
- osgi
- package
- shell
- ssh
- wrapper

ADMIN SHELL

This shell is described extensively in section 4.7. Administration.

CONFIG SHELL

This shell is described extensively in section 4.8. Configuration.

FEATURES SHELL

The features shell contains a few commands to provision entire applications easily. More information is available on the chapter 4.6. Provisioning.

LOG SHELL

The log shell contains a few commands to display the log entries, retrieve or change the log levels:

Command	Description
---------	-------------

display	Display log entries.
display-exception	Display the last exception from the log.
get	Show log level.
set	Set log level.

See the documentation on the logging system for more informations.

OBR SHELL

OBR (OSGi Bundle Repository) is a proposed specification that defines an xml format for repositories of OSGi bundles and an associated service to access it. Karaf proposes a number of commands that can be used to deal with such repositories.

Note that this feature is not installed by default. To install it, you must run the following command:

```
karaf@root:/> features:install obr
```

Command	Description
addUrl	Add a list of repository URLs to the repository service
deploy	Deploy
info	Display the meta-data for the specified bundles.
list	List
listUrl	Display the repository URLs currently associated with the repository service.
removeUrl	Remove a list of repository URLs from the repository service
source	Source
start	Start

OSGI SHELL

The OSGi sub-shell provides commands for managing the OSGi framework: listing OSGi bundles, services, managing bundle lifecycles.

Look at the online help (launch `osgi help` command) for more informations.

Command	Description
bundle-level	Get or set the start level of a given bundle

headers	Display headers
install	Install bundle
list	List bundles
ls	List services
refresh	Refresh bundle
update	Update bundle
resolve	Resolve bundle
shutdown	Shutdown
start	Start bundle
start-level	Get or set the start level
stop	Stop bundle
uninstall	Uninstall bundle

PACKAGE SHELL

Command	Description
imports	Display imported packages
exports	Display exported packages

SHELL SHELL

Command	Description
cat	Displays the content of a file or url
echo	Echoes or prints arguments to STDOUT
exec	Executes system processes
grep	Prints lines matching the given pattern
info	Prints system informations
java	Execute a Java standard application
printf	Format and print arguments
sleep	Sleeps for a bit then wakes up

sort	Write sorted concatenation of all files to standard output.
tac	Captures the STDIN and returns it as a string. Optionally writes the content to a file

Examples:

```
cat mvn:org.apache.servicemix/servicemix/3.2.1/pom
```

or

```
log:display | grep error
```

SSH SHELL

Command	Description
ssh	Connects to a remote SSH server
sshd	Creates a SSH server

WRAPPER SHELL

Note that this feature is not installed by default. To install it, you must run the following command:

```
karaf@root:/> features:install wrapper
```

Command	Description
install	Install the container as a system service in the OS.

4.2. Remote Console

The remote console feature allows to connect to a running Karaf instance from a remote computer and perform all the operations that are usually accessible from the local console.

LAUNCH OPTIONS

The Karaf shell scripts supports a number of options to control the remote console:

- **console:** launch Karaf in the default mode (both local and remote console activated). This is the default mode
- **server:** launch Karaf in with a remote console but no local console
- **client:** launch Karaf in with a local console only

These options affect two system properties that can be set if you don't use the standard shell scripts:

- `karaf.startLocalConsole`
- `karaf.startRemoteShell`

USING THE CLIENT JAR

It is also possible to use a more lightweight way to connect to a Karaf instance using the following command line:

```
java -jar lib/karaf-client.jar
```

There are a few parameters that can be set on the command line to change the URL used to connect to the Kernel, the user or the password.

All these parameters are detailed in the help screen:

```
> java -jar lib/karaf-client.jar --help
Apache Felix Karaf client
-a [address]  specify the URL to connect to
-h [host]    specify the host to connect to
-u [user]    specify the user name
-p [password] specify the password
--help       shows this help message
[commands]   commands to run
If no commands are specified, the client will be put in an interactive mode
```

For example, to shut down the Kernel from the command line, you can run the following command:

```
> java -jar lib/karaf-client.jar
smx@root:/> osgi:shutdown
smx@root:/>
>
```

The client jar also supports passing command line arguments to the remote Karaf.

```
> java -jar lib/karaf-client.jar osgi:shutdown
>
```

USING AN SSH CLIENT

You can use any standard SSH client to connect to a Karaf instance. The default port is 8101.

```
> ssh -p 8101 -l karaf localhost
karaf@localhost's password: karaf
karaf@root:/>
```

USING ANOTHER KARAF INSTANCE

First, open a terminal and launch Karaf in server mode (you could use a Karaf instance in console mode too):

```
bin/karaf server
```

On another terminal, start another Karaf instance in client mode:

```
bin/karaf client
```

Once the console appears, you can run the `remote rsh` command to connect to the other Kernel:

```
remote rsh tcp://localhost:8101/ -u karaf -p karaf
```

You can also do that in a single command line from the prompt by appending the previous ServiceMix command to the shell command:

```
bin/karaf client remote rsh tcp://localhost:8101/ -u karaf -p karaf
```

To verify that you are connected to the remote instance, run the following command:



User another Karaf instance to start the client

At this point in time, you can not use the same Karaf installation to start both the server and the client, so you need to create a new instance using the 'admin create xxx' command and use that one to start the client. If you are on a different host or already use another copy of Karaf, this requirement does not hold.

```
info
```

and check the system informations.

Configuration

The TCP port is configured at the following location:

```
[KARAF]/etc/org.apache.felix.karaf.shell.cfg
```

The default configuration is as below:

```
startLocalConsole=${karaf.startLocalConsole}  
startRemoteShell=${karaf.startRemoteShell}  
sshPort=8101  
sshRealm=karaf  
hostKey=${karaf.base}/etc/host.key
```

The port used can easily be changed by changing the default port 8101 in the `sshPort` property.

The security realm used by the console when authenticating remote users is named `karaf`, so you can override this realm as explained in the security section.

4.3. Logging system

Karaf provides a powerful logging system based on OPS4j Pax Logging.

In addition to being a standard OSGi Log service, it supports the following APIs:

- Apache Commons Logging
- SLF4j
- Apache Log4j
- Java Util Logging

Karaf also comes with a set of console commands that can be used to display, view and change the log levels.

CONFIGURATION

The configuration of the logging system uses a standard Log4j configuration file at the following location:

```
[karaf]/etc/org.ops4j.pax.logging.cfg
```

You can edit this file at runtime and any change will be reloaded and be effective immediately.

COMMANDS

The log subshell comes with 3 commands:

- `log:display`: display the last log entries
- `log:display-exception`: display the last exception from the log
- `log:get`: show the log levels
- `log:set`: set the log levels

For example, if you want to debug something, you might want to run the following commands:


```
> log:set DEBUG
... do something ...
> log:display
```

Note that the log levels set using the `log:set` commands are not persistent and will be lost upon restart.

To configure those in a persistent way, you should edit the configuration file mentioned above.

4.4. Deployer

The following picture describes the architecture of the deployer.

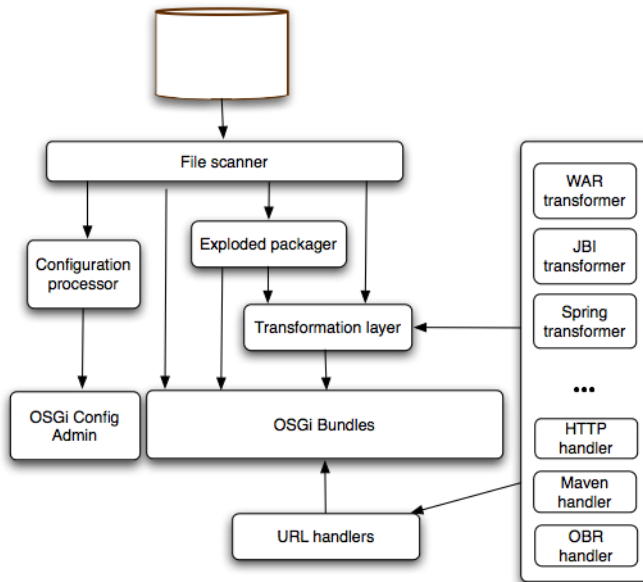

SPRING DEPLOYER

Karaf includes a deployer that is able to deploy plain spring / spring-dm configuration files. The deployer will transform on the fly any spring configuration file dropped into the `deploy` folder into a valid OSGi bundle.

The generated OSGi manifest will contain the following headers:

```
Manifest-Version: 2
Bundle-SymbolicName: [name of the file]
Bundle-Version: [version of the file]
Spring-Context: *;publish-context:=false;create-asynchronously:=true
Import-Package: [required packages]
DynamicImport-Package: *
```

The name and version of the file are extracted using a heuristic that will match common patterns. For example `my-config-1.0.1.xml` will lead to `name = my-config` and `version = 1.0.1`.

The default imported packages are extracted from the spring file definition and includes all classes referenced directly.

If you need to customize the generated manifest, you can do so by including an xml element in your spring configuration:

```
<spring:beans ...>
  <manifest>
    Require-Bundle= my-bundle
  </manifest>
```

FEATURES DEPLOYER

To be able to hot deploy features from the deploy folder, you can just drop a feature descriptor on that folder. A bundle will be created and its installation (automatic) will trigger the installation of all features contained in the descriptor. Removing the file from the deploy folder will uninstall the features.

If you want to install a single feature, you can do so by writing a feature descriptor like the following:

```
<features>
  <repository>mvn:org.apache.servicemix.nmr/apache-servicemix-nmr/1.0.0/xml/
features</repository>
  <feature name="nmr-only">
    <feature>nmr</feature>
  </feature>
</features>
```

For more informations about features, see the provisioning section.

4.5. Security framework

Karaf supports JAAS with some enhancements to allow JAAS to work nicely in an OSGi environment. This framework also features an OSGi keystore manager with the ability to deploy new keystores or truststores at runtime.

OVERVIEW

This feature allow the deployment at runtime of JAAS based configuration for use in various parts of the application. This includes the remote console login, which uses the `karaf` realm, but which is configured with a dummy login module by default. These realms can also be used by the NMR, JBI components or the JMX server to authenticate users logging in or sending messages into the bus.

In addition to JAAS realms, you can also deploy keystores and truststores to secure the remote shell console, setting up HTTPS connectors or using certificates for WS-Security.

A very simple XML schema for spring has been defined, allowing the deployment of a new realm or a new keystore very easily.

SCHEMA

To deploy a new realm, you can use the following XSD which is supported by a Spring namespace handler and can thus be defined in a spring xml configuration file.

Listing 1. JAAS XSD Schema

```
<xs:schema elementFormDefault='qualified'
  targetNamespace='http://felix.apache.org/karaf/xmlns/jaas/v1.0.0'
  xmlns:xs='http://www.w3.org/2001/XMLSchema'
  xmlns:bp="http://www.osgi.org/xmlns/blueprint/v1.0.0"
  xmlns:tns='http://felix.apache.org/karaf/xmlns/jaas/v1.0.0'>

  <xs:import namespace="http://www.osgi.org/xmlns/blueprint/v1.0.0"/>

  <xs:element name="config">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="module" minOccurs="0" maxOccurs="unbounded">
          <xs:complexType mixed="true">
            <xs:attribute name="className" use="required" type="xs:string" />
            <xs:attribute name="flags" default="required">
              <xs:simpleType>
                <xs:restriction base="xs:NMTOKEN">
```

```

        <xs:enumeration value="required"/>
        <xs:enumeration value="requisite"/>
        <xs:enumeration value="sufficient"/>
        <xs:enumeration value="optional"/>
    </xs:restriction>
    </xs:simpleType>
</xs:attribute>
</xs:complexType>
</xs:element>
</xs:sequence>
<xs:attribute name="name" use="required" type="xs:string" />
<xs:attribute name="rank" use="optional" default="0" type="xs:int" />
</xs:complexType>
</xs:element>

<xs:element name="keystore">
    <xs:complexType>
        <xs:attribute name="name" use="required" type="xs:string" />
        <xs:attribute name="rank" use="optional" default="0" type="xs:int" />
        <xs:attribute name="path" use="required" type="xs:string" />
        <xs:attribute name="keystorePassword" use="optional" type="xs:string" />
        <xs:attribute name="keyPasswords" use="optional" type="xs:string" />
    </xs:complexType>
</xs:element>

</xs:schema>

```

You can find the schema at the following location.

Here are two example using this schema:

Listing 2. JAAS realm example

```

<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0"
    xmlns:jaas="http://felix.apache.org/karaf/xmlns/jaas/v1.0.0"
    xmlns:ext="http://geronimo.apache.org/blueprint/xmlns/blueprint-ext/v1.0.0">

    <!-- Bean to allow the ${karaf.base} property to be correctly resolved -->
    <ext:property-placeholder placeholder-prefix="${" placeholder-suffix="}"/>

    <jaas:config name="karaf">
        <jaas:module
            className="org.apache.felix.karaf.jaas.modules.properties.PropertiesLoginModule"
            flags="required">
            users = ${karaf.base}/etc/users.properties
        </jaas:module>
    </jaas:config>

</blueprint>

```

Listing 3. Keystore example

```
<jas:keystore xmlns:jas="http://felix.apache.org/karaf/xmlns/jas/v1.0.0"
  id="keystore"
  name="ks"
  rank="1"
  path="classpath:privatestore.jks"
  keystorePassword="keyStorePassword"
  keyPasswords="myalias=myAliasPassword">
</jas:keystore>
```

The `id` attribute is the blueprint id of the bean, but it will be used by default as the name of the realm if no `name` attribute is specified. Additional attributes on the `config` elements are a `rank`, which is an integer. When the `LoginContext` looks for a realm for authenticating a given user, the realms registered in the OSGi registry are matched against the required name. If more than one realm is found, the one with the highest rank will be used, thus allowing the override of some realms with new values. The last attribute is `publish` which can be set to `false` to not publish the realm in the OSGi registry, hereby disabling the use of this realm.

Each realm can contain one or more module definition. Each module identify a `LoginModule` and the `className` attribute must be set to the class name of the login module to use. Note that this login module must be available from the bundle classloader, so either it has to be defined in the bundle itself, or the needed package needs to be correctly imported. The `flags` attribute can take one of four values that are explained on the JAAS documentation. The content of the `module` element is parsed as a properties file and will be used to further configure the login module.

Deploying such a code will lead to a `JaasRealm` object in the OSGi registry, which will then be used when using the JAAS login module.

ARCHITECTURE

Due to constraints in the JAAS specification, one class has to be available for all bundles. This class is called `ProxyLoginModule` and is a `LoginModule` that acts as a proxy for an OSGi defines `LoginModule`. If you plan to integrate this feature into another OSGi runtime, this class must be made available from the system classloader and the related package be part of the boot delegation classpath (or be deployed as a fragment attached to the system bundle).

The xml schema defined above allow the use of a simple xml (leveraging spring xml extensibility) to configure and register a JAAS configuration for a given realm. This configuration will be made available into the OSGi registry as a `JaasRealm` and the OSGi specific Configuration will look for such services. Then the proxy login module will be able to use the information provided by the realm to actually load the class from the bundle containing the real login module.

4.6. Provisioning

Karaf provides a simple, yet flexible, way to provision applications or "features". Such a mechanism is mainly provided by a set of commands available in the `features` shell. The provisioning system uses xml "repositories" that define a set of features.

REPOSITORIES

The xml repositories use the following Relax NG Compact syntax:

Listing 4. Repository schema

```
element features {
  element repository { text }*
  element feature {
    attribute name { text },
    attribute version { text },
    element feature {
      attribute version { text },
      text
    }*,
    element config {
      attribute name { text },
      text
    }*,
    element bundle { text }*
  }*
}
```

Here is an example of such a repository:

```
<features>
  <feature name="spring" version="2.5.6.SEC01">
    <bundle>mvn:org.apache.servicemix.bundles/
org.apache.servicemix.bundles.aopalliance/1.0_1</bundle>
    <bundle>mvn:org.springframework/spring-core/2.5.6.SEC01</bundle>
    <bundle>mvn:org.springframework/spring-beans/2.5.6.SEC01</bundle>
    <bundle>mvn:org.springframework/spring-aop/2.5.6.SEC01</bundle>
    <bundle>mvn:org.springframework/spring-context/2.5.6.SEC01</bundle>
    <bundle>mvn:org.springframework/spring-context-support/2.5.6.SEC01</bundle>
  </feature>
</features>
```

A repository includes a list of `feature` elements, each one representing an application that can be installed. The feature is identified by its `name` which must be unique amongst all the repositories used and consists of a set of bundles that need to be installed along with some

optional dependencies on other features and some optional configurations for the Configuration Admin OSGi service.

Bundles

The main information provided by a feature is the set of OSGi bundles that defines the application. Such bundles are URLs pointing to the actual bundle jars. For example, one would write the following definition:

```
<bundle>http://repol.maven.org/maven2/org/apache/servicemix/nmr/
org.apache.servicemix.nmr.api/1.0.0-m2/
org.apache.servicemix.nmr.api-1.0.0-m2.jar</bundle>
```

Doing this will make sure the above bundle is installed while installing the feature.

However, Karaf provides several URL handlers, in addition to the usual ones (file, http, etc...). One of these is the maven URL handler, which allow reusing maven repositories to point to the bundles.

Maven URL Handler

The equivalent of the above bundle would be:

```
<bundle>mvn:org.apache.servicemix.nmr/org.apache.servicemix.nmr.api/1.0.0-m2</bundle>
```

In addition to being less verbose, the maven url handlers can also resolve snapshots and can use a local copy of the jar if one is available in your maven local repository.

The `org.ops4j.pax.url.mvn` bundle resolves mvn URLs. This flexible tool can be configured through the configuration service. For example, to find the current repositories type:

```
karaf@root:/> config:list
...
-----
Pid:                org.ops4j.pax.url.mvn
BundleLocation:     mvn:org.ops4j.pax.url/pax-url-mvn/0.3.3
Properties:
  service.pid = org.ops4j.pax.url.mvn
  org.ops4j.pax.url.mvn.defaultRepositories = file:/opt/development/karaf/assembly/
target/apache-felix-karaf-1.2.0-SNAPSHOT/system@snapshots
  org.ops4j.pax.url.mvn.repositories = http://repol.maven.org/maven2,
                                         http://people.apache.org/repo/
m2-snapshot-repository@snapshots@noreleases,
                                         http://repository.ops4j.org/maven2,
                                         http://svn.apache.org/repos/asf/servicemix/
```

```
m2-repo
below = list of repositories and even before the local repository
```

The repositories checked are controlled by these configuration properties.

For example, `org.ops4j.pax.url.mvn.repositories` is a comma separate list of repository URLs specifying those remote repositories to be checked. So, to replace the defaults with a new repository at `http://www.example.org/repo` on the local machine:

```
karaf@root:/> config:edit org.ops4j.pax.url.mvn
karaf@root:/> config:proplist
  service.pid = org.ops4j.pax.url.mvn
  org.ops4j.pax.url.mvn.defaultRepositories = file:/opt/development/karaf/assembly/
target/apache-felix-karaf-1.2.0-SNAPSHOT/system@snapshots
  org.ops4j.pax.url.mvn.repositories = http://repol.maven.org/maven2,
                                     http://people.apache.org/repo/
m2-snapshot-repository@snapshots@noreleases,
                                     http://repository.ops4j.org/maven2,
                                     http://svn.apache.org/repos/asf/servicemix/
m2-repo
  below = list of repositories and even before the local repository
karaf@root:/> config:propset org.ops4j.pax.url.mvn.repositories http://www.example.org/
repo
karaf@root:/> config:update
```

By default, snapshots are disable. To enable an URL for snapshots append `@snapshots`. For example

```
http://www.example.org/repo@snapshots
```

Repositories on the local are supported through `file:/` URLs

Dependant features

Dependant features are usefull when a given feature depends on another feature to be installed. Such a dependency can be expressed easily in the feature definition:

```
<feature name="jbi">
  <feature>nmr</feature>
  ...
</feature>
```

The effect of such a dependency is to automatically install the required `nmr` feature when the `jbi` feature will be installed.

Configurations

The configuration section allows to deploy configuration for the OSGi Configuration Admin service along a set of bundles.

Here is an example of such a configuration:

```
<config name="com.foo.bar">
  myProperty = myValue
</config>
```

The `name` attribute of the `configuration` element will be used as the `ManagedService` PID for the configuration set in the Configuration Admin service. When using a `ManagedServiceFactory`, the `name` attribute is `servicePid-aliasId`, where `servicePid` is the PID of the `ManagedServiceFactory` and `aliasId` is a label used to uniquely identify a particular service (an alias to the factory generated service PID).

Deploying such a configuration has the same effect than dropping a file named `com.foo.bar.cfg` into the `etc` folder.

The content of the `configuration` element is set of properties parsed using the standard java property mechanism.

Such configuration as usually used with Spring-DM or Blueprint support for the Configuration Admin service, as in the following example, but using plain OSGi APIs will of course work the same way:

```
<bean ...>
  <property name="propertyName" value="${myProperty}" />
</bean>

<osgix:cm-properties id="cmProps" persistent-id="com.foo.bar">
  <prop key="myProperty">myValue</prop>
</osgix:cm-properties>
<ctx:property-placeholder properties-ref="cmProps" />
```

For more informations about using the Configuration Admin service in Spring-DM, see the Spring-DM documentation.

COMMANDS

Repository management

The following commands can be used to manage the list of descriptors known by Karaf. They use URLs pointing to features descriptors. These URLs can use any protocol known to the ServiceMix Kernel, the most common ones being `http`, `file` and `mvn`.

```
features:addUrl      Add a list of repository URLs to the features service
features:removeUrl   Remove a list of repository URLs from the features service
features:listUrl     Display the repository URLs currently associated with the
features service.
features:refreshUrl  Reload the repositories to obtain a fresh list of features
```

Karaf maintains a persistent list of these repositories so that if you add one URL and restart Karaf, the features will still be available.

The `refreshUrl` command is mostly used when developing features descriptors: when changing the descriptor, it can be handy to reload it in the Kernel without having to restart it or to remove then add again this URL.

Features management

```
features:install
features:uninstall
features:list
```

Examples

```
features/addUrl mvn:org.apache.servicemix.nmr/apache-servicemix-nmr/1.0.0-m2/xml/
features
features/install nmr
```

SERVICE CONFIGURATION

A simple configuration file located in `[karaf]/etc/org.apache.servicemix.features.cfg` can be modified to customize the behavior when starting the Kernel for the first time.

This configuration file contains two properties:

- `featuresBoot`: a comma separated list of features to install at startup
- `featuresRepositories`: a comma separated list of feature repositories to load at startup

This configuration file is of interest if you plan to distribute a ServiceMix Kernel distribution which includes pre-installed features. Such a process is detailed in the 6.2. Building custom distributions section.

4.7. Administration

Karaf provides some commands to administer multiple instances. An instance of Karaf is a copy that you can launch separately and deploy applications onto. An instance does not contain a full copy of Karaf, but only a copy of the configuration files and `data` folder which contains all runtime informations, logs and temporary files.

Commands	Description
change-port	Changes the port of an existing container instance.
connect	Connects to an existing container instance.
create	Creates a new container instance.
destroy	Destroys an existing container instance.
list	List all existing container instances.
start	Starts an existing container instance.
stop	Stops an existing container instance.

4.8. Configuration

The files in the `etc` directory are used to set the startup configuration.

For dynamic configuration, Karaf provides a suite of command to administer the configuration service grouped under `config`. To learn about all currently supported configuration commands type:

Command	Description
<code>cancel</code>	Change the changes to the configuration being edited.
<code>edit</code>	Create or edit a configuration.
<code>list</code>	List existing configurations.
<code>propdel</code>	Delete a property from the edited configuration.
<code>proplist</code>	List properties from the edited configuration.
<code>propset</code>	Set a property on the edited configuration.
<code>update</code>	Save and propagate changes from the configuration being edited.

EDITING

Select Configuration To Edit

For example to edit configuration `foo.bar`:

```
karaf@root:/> config:edit foo.bar
```

Modify Properties

Use:

- `config:proplist` to list existing properties
- `config:propdel` to delete existing properties
- `config:propset` to set a new value for a property

Any number of properties can be modified within a single editing session.

Commit Or Rollback Changes

Use

- `config:update` to commit all changes made in the current session
- `config:cancel` to roll back any changes made in the current session

5. Using Karaf

- 5.1. Troubleshooting, Debugging and Profiling
- 5.2. Developing applications
- 5.3. Creating bundles for third party dependencies

5.1. Troubleshooting, Debugging and Profiling

TROUBLESHOOTING

Logging

Logging is easy to control through the console, with commands grouped under *log* shell. To learn about the available logging commands type:

```
karaf@root> log<tab>

log:display          log:display-exception  log:get              log:set
karaf@root>
```

Typical usage is:

1. Use `log:set` to dynamically change the global log level
2. Execute the problematic operation
3. Use `log:display` (or `log:display-exception` to display the log

Worst Case Scenario

If you end up with a Karaf in a really bad state (i.e. you can not boot it anymore) or you just want to revert to a clean state quickly, you can safely remove the `data` directory just in the installation directory. This folder contains transient data and will be recreated if you remove it and relaunch Karaf.

You may also want to remove the files in the `deploy` folder to avoid them being automatically installed when Karaf is started the first time.

DEBUGGING

Usually, the easiest way to debug Karaf or any application deployed onto it is to use remote debugging.

Remote debugging can be easily activated by setting the `KARAF_DEBUG` environment variable to `TRUE`.

This can be done using the following command on Unix systems:

```
export KARAF_DEBUG=true
```

On Windows, use the following command

```
set KARAF_DEBUG=true
```

Then, you can launch Karaf using the usual way:

```
bin/karaf
```

or

```
bin\karaf.bat
```

Last, inside your IDE, connect to the remote application (the default port to connect to is 5005).

PROFILING

YourKit

You need a few steps to be able to profile Karaf using YourKit.

The first one is to edit the `etc/config.properties` configuration file and add the following property:

```
org.osgi.framework.bootdelegation=com.yourkit.*
```

Then, set the `JAVA_OPTS` environment variable:

```
export JAVA_OPTS='-Xmx512M -agentlib:yjpagent'
```

or, on Windows

```
set JAVA_OPTS='-Xmx512M -agentlib:yjpagent'
```

Run Karaf from the console, and you should now be able to connect using YourKit standalone or from your favorite IDE.

5.2. Developing applications

TODO

5.3. Creating bundles for third party dependencies

TODO

Some infos available at <http://gnodet.blogspot.com/2008/09/id-like-to-talk-bit-about-third-party.html>, <http://blog.springsource.com/2008/02/18/creating-osgi-bundles/> and <http://felix.apache.org/site/apache-felix-maven-bundle-plugin-bnd.html>.

6. Advanced uses

- 6.1. Extending the console
- 6.2. Building custom distributions
- 6.3. Programmatically connect to the console
- 6.4. Embedding Karaf
- 6.5. Deploying security providers
- 6.6. Installing additional features
- 6.7. Configuring Failover Deployments

6.1. Extending the console

This chapter will guide you through the steps needed to extend the console and create a new shell. We will leverage Maven, Blueprint and OSGi, so you will need some knowledge of those products.

CREATE THE PROJECT USING MAVEN

We first need to create the project using maven. Let's leverage maven archetypes for that.

Command line

Using the command line, we can create our project:

```
mvn archetype:create \
  -DarchetypeArtifactId=maven-archetype-quickstart \
  -DgroupId=org.apache.felix.karaf.shell.samples \
  -DartifactId=shell-sample-commands \
  -Dversion=1.0-SNAPSHOT
```

This generate the main `pom.xml` and some additional packages.

Interactive shell

You can also use the interactive mode for creating the skeleton project:

```
mvn archetype:generate
```

Use the following values when prompted:

```
Choose a number:  (1/2/3/4/5/6/7/8/9/10/11/12/13/14/15/16/17/18/19/20/21/22/23/24/25/
26/27/28/29/30/31/32/33/34/35/36) 15: : 15
Define value for groupId: : org.apache.felix.karaf.shell.samples
Define value for artifactId: : shell-sample-commands
Define value for version:  1.0-SNAPSHOT: :
Define value for package:  : org.apache.felix.karaf.shell.samples
```

Manual creation

Alternatively, you can simply create the directory `shell-sample-commands` and create the `pom.xml` file inside it:

Listing 5. pom.xml

```
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/
maven-v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>org.apache.felix.karaf.shell.samples</groupId>
  <artifactId>shell-sample-commands</artifactId>
  <packaging>jar</packaging>
  <version>1.0-SNAPSHOT</version>
  <name>shell-sample-commands</name>
  <url>http://maven.apache.org</url>
  <dependencies>
    <dependency>
      <groupId>junit</groupId>
      <artifactId>junit</artifactId>
      <version>3.8.1</version>
      <scope>test</scope>
    </dependency>
  </dependencies>
</project>
```

DEPENDENCIES

We need to tell maven which libraries our project depends on. In the `dependencies` section of the `pom`, add the following one:

```
<dependency>
  <groupId>org.apache.felix.karaf.shell</groupId>
  <artifactId>org.apache.felix.karaf.shell.console</artifactId>
  <version>1.0.0</version>
</dependency>
```

This dependency is needed to have access to the base classes that are used to define commands.

CONFIGURING FOR JAVA 5

We are using annotations to define commands, so we need to ensure maven will actually use JDK 1.5 to compile the jar.

Just add the following snippet after the `dependencies` section.

```
<build>
  <plugins>
    <plugin>
      <groupId>org.apache.maven.plugins</groupId>
      <artifactId>maven-compiler-plugin</artifactId>
      <configuration>
        <target>1.5</target>
        <source>1.5</source>
      </configuration>
    </plugin>
  </plugins>
</build>
```

LOADING THE PROJECT IN YOUR IDE

We can use maven to generate the needed files for your IDE:

Inside the project, run the following command

```
mvn eclipse:eclipse
```

or

```
mvn idea:idea
```

The project files for your IDE should now be created. Just open the IDE and load the project.

CREATING A BASIC COMMAND CLASS

We can now create the command class `HelloShellCommand.java`

Listing 6. HelloShellCommand.java

```
package org.apache.felix.karaf.shell.samples;

import org.apache.felix.gogo.commands.Command;
import org.apache.felix.gogo.commands.Option;
import org.apache.felix.gogo.commands.Argument;
import org.apache.felix.karaf.shell.console.OsgiCommandSupport;

@Command(scope = "test", name = "hello", description="Says hello")
public class HelloShellCommand extends OsgiCommandSupport {

    @Override
    protected Object doExecute() throws Exception {
        System.out.println("Executing Hello command");
        return null;
    }
}
```

```
}  
}
```

CREATING THE ASSOCIATED BLUEPRINT CONFIGURATION FILES

The blueprint configuration file will be used to create the command and register it in the OSGi registry, which is the way to make the command available to Karaf console. This blueprint file must be located in the `OSGI-INF/blueprint/` directory inside the bundle.

If you don't have the `src/main/resources` directory yet, create it.

```
mkdir src/main/resources
```

Then, re-generate the IDE project files and reload it so that this folder is now recognized as a source folder.

Inside this directory, create the `OSGI-INF/blueprint/` directory and put the following file inside (the name of this file has no impact at all):

Listing 7. shell-config.xml

```
<blueprint xmlns="http://www.osgi.org/xmlns/blueprint/v1.0.0">  
  
  <command-bundle xmlns="http://felix.apache.org/karaf/xmlns/shell/v1.0.0">  
    <command name="test/hello">  
      <action class="org.apache.felix.karaf.shell.samples.HelloShellCommand"/>  
    </command>  
  </command-bundle>  
  
</blueprint>
```

COMPILING THE JAR

Let's try to build the jar. Remove the test classes and sample classes if you used the artifact, then from the command line, run:

```
mvn install
```

The end of the maven output should look like:

```
[SMX4KNL:INFO] -----  
[SMX4KNL:INFO] BUILD SUCCESSFUL  
[SMX4KNL:INFO] -----
```

TURNING THE JAR INTO AN OSGI BUNDLE

OSGi bundles are jars but they require some manifest headers to be correctly recognized. We will leverage Felix's maven plugin to easily generate those.

Lets turn it into a bundle: modify the line in the `pom.xml` to adjust the packaging:

```
<packaging>bundle</packaging>
```

Add the following section at the bottom of the `pom.xml`, in the existing `build/plugins` section:

```
<plugin>
  <groupId>org.apache.felix</groupId>
  <artifactId>maven-bundle-plugin</artifactId>
  <version>2.0.1</version>
  <extensions>true</extensions>
  <configuration>
    <instructions>
      <Import-Package>org.osgi.service.command,*</Import-Package>
    </instructions>
  </configuration>
</plugin>
```

The `Import-Package` is required to make sure our bundle will import the `org.osgi.service.command` package so that the service will be correctly seen in Felix.

Let's compile it again using the `mvn install` command.

TEST IN KARAF

Launch a Karaf instance and run the following command to install the newly created bundle:

```
karaf@root> osgi:install -s mvn:org.apache.felix.karaf.shell.samples/
shell-sample-commands/1.0-SNAPSHOT
```

Let's try running the command:

```
karaf@root> test:hello
Executing Hello command
```

and for the link:

Yeah 😊

6.2. Building custom distributions

TODO

6.3. Programmatically connect to the console

A connection to Karaf console can also be done programmatically.

The following code is a simplified version of the code from the client library.

```
import org.apache.sshd.ClientChannel;
import org.apache.sshd.ClientSession;
import org.apache.sshd.SshClient;
import org.apache.sshd.client.future.ConnectFuture;

public class Main {

    public static void main(String[] args) throws Exception {
        String host = "localhost";
        int port = 8101;
        String user = "karaf";
        String password = "karaf";

        SshClient client = null;
        try {
            client = SshClient.setUpDefaultClient();
            client.start();
            ConnectFuture future = client.connect(host, port);
            future.await();
            ClientSession session = future.getSession();
            session.authPassword(user, password);
            ClientChannel channel = session.createChannel("shell");
            channel.setIn(System.in);
            channel.setOut(System.out);
            channel.setErr(System.err);
            channel.open();
            channel.waitFor(ClientChannel.CLOSED, 0);
        } catch (Throwable t) {
            t.printStackTrace();
            System.exit(1);
        } finally {
            try {
                client.stop();
            } catch (Throwable t) { }
        }
        System.exit(0);
    }
}
```

You can find a more complete example at the following location.

6.4. Embedding Karaf

TODO: an example of embedding Karaf inside a web application is provided in the distribution

6.5. Deploying security providers

Some applications require specific security providers to be available, such as BouncyCastle. The JVM impose some restrictions about the use of such jars: they have to be signed and be available on the boot classpath. One way to deploy those providers is to put them in the JRE folder at `$JAVA_HOME/jre/lib/ext` and modify the security policy configuration (`$JAVA_HOME/jre/lib/security/java.security`) in order to register such providers.

While this approach works fine, it has a global effect and require you to configure all your servers accordingly.

Karaf offers a simple way to configure additional security providers:

- put your provider jar in `[KARAF]/lib`
- modify the `[KARAF]/etc/config.properties` configuration file to add the following property

```
org.apache.felix.karaf.security.providers = xxx,yyy
```

The value of this property is a comma separated list of the provider class names to register. For example:

```
org.apache.felix.karaf.security.providers =  
org.bouncycastle.jce.provider.BouncyCastleProvider
```

In addition, you may want to provide access to the classes from those providers from the system bundle so that all bundles can access those. It can be done by modifying the `org.osgi.framework.bootdelegation` property in the same configuration file:

```
org.osgi.framework.bootdelegation = ...,org.bouncycastle*
```



Outdated documentation

6.6. Installing additional features

This chapter will demonstrate how to add additional features from a remote maven repository to a default installation of Karaf.

ADDING ADDITIONAL MAVEN REPOSITORIES

The following steps will add in the missing OPS4J and Apache Snapshot maven repositories.

Note - this has been fixed in the 1.1.0 release and can be skipped.

1. Edit the following file -

```
etc/org.ops4j.pax.url.mvn.cfg
```

2. Update *org.ops4j.pax.url.mvn.repositories* to include the OPS4J and Apache Snapshot repos -

```
org.ops4j.pax.url.mvn.repositories=file:${user.home}/.m2/
repository@snapshots,http://repo1.maven.org/
maven2,http://repository.ops4j.org/
maven2,http://people.apache.org/repo/
m2-snapshot-repository@snapshots@noreleases
```

ADDING ADDITIONAL FEATURE REPOSITORIES

The following steps will add in the URLs for the ServiceMix NMR and Features locations.

1. Start Karaf

```
cd bin
./servicemix or servicemix.bat
```

2. Add the following feature install locations

```
servicemix> features/addUrl mvn:org.apache.servicemix.nmr/
apache-servicemix-nmr/1.0.0-m4/xml/features
servicemix> features/addUrl
mvn:org.apache.servicemix.features/apache-servicemix/
4.0-m2-SNAPSHOT/xml/features
```

3. Verify the feature URLs were added -



Last updated January 13, 2009 using smx4knl 1.1.0-SNAPSHOT

```

servicemix> features/listUrl
mvn:org.apache.servicemix.nmr/apache-servicemix-nmr/
1.0.0-m4-SNAPSHOT/xml/features
mvn:org.apache.servicemix.kernel/apache-servicemix-kernel/
1.1.0-SNAPSHOT/xml/features
mvn:org.apache.servicemix.features/apache-servicemix/
4.0-m2-SNAPSHOT/xml/features

```

INSTALLING A NEW FEATURE (WEB)

The following steps will install the "web" feature (support for deploying WAR files with Servlet and JSPs into a Jetty server) into your Karaf instance.

1. List the available features -

```

servicemix> features/list
State      Name
. . .
[SMX4KNL:uninstalled] web
. . .

```

2. Install the web feature (and the sub-features it requires) -

```

servicemix> features/install web

```

3. Verify the features were installed

```

servicemix> features/list
State      Name
. . .
[SMX4KNL:installed  ] web-core
[SMX4KNL:installed  ] web
. . .

```

4. Verify the installed bundles were started

```

servicemix> osgi/list
START LEVEL 100
ID      State      Level  Name
. . .

```

```

[SMX4KNL: 29] [SMX4KNL:Active      ] [SMX4KNL: 50]
Apache ServiceMix Bundles: jetty-6.1.14 (6.1.14.SNAPSHOT)
[SMX4KNL: 30] [SMX4KNL:Active      ] [SMX4KNL: 50]
OPS4J Pax Web - Web Container (0.4.1)
[SMX4KNL: 31] [SMX4KNL:Active      ] [SMX4KNL: 50]
OPS4J Pax Web - Jsp Support (0.4.1)
[SMX4KNL: 32] [SMX4KNL:Active      ] [SMX4KNL: 50]
OPS4J Pax Web Extender - WAR (0.3.0)
[SMX4KNL: 33] [SMX4KNL:Active      ] [SMX4KNL: 50]
OPS4J Pax Web Extender - Whiteboard (0.3.0)
[SMX4KNL: 34] [SMX4KNL:Active      ] [SMX4KNL: 50]
OPS4J Pax Url - war:, war-i: (0.3.2)
[SMX4KNL: 35] [SMX4KNL:Active      ] [SMX4KNL: 50]
Apache ServiceMix WAR Deployer (4.0.0.m2-SNAPSHOT)
. . .

```

5. The Jetty server should now be listening on `http://localhost:8080/`, but with no published applications available.

```

HTTP ERROR: 404
NOT_FOUND
RequestURI=/
Powered by jetty://

```

DEPLOYING A WAR TO THE INSTALLED WEB FEATURE

The following steps will describe how to install a simple WAR file (with JSPs or Servlets) to the just installed web feature.

1. To deploy a WAR (JSP or Servlet) to Jetty, update its MANIFEST.MF to include the required OSGi headers as described here - <http://wiki.ops4j.org/confluence/display/ops4j/Pax+Web+Extender+-+War+-+OSGi-fy>
2. Copy the updated WAR (archive or extracted files) to the *deploy* directory.

6.7. Configuring Failover Deployments

This chapter will demonstrate how to configure failover deployments.

SIMPLE LOCK FILE

The Simple Lock File mechanism is intended for failover configurations where instances reside on one host machine.

To use this feature the following must be set on each system in the master/slave setup:

- `$KARAF_HOME/etc/system.properties` file updated to reflect the below entries.

```
karaf.lock=true
karaf.lock.delay=10
```

Simple Lock File with container level locking.

The Container Level locking mechanism allows bundles to be loaded into the slave kernel instance in order to provide faster failover performance. The Container Level refers to the starting priority assigned to each bundle in the OSGI container. These start levels are specified in `$KARAF_HOME/etc/startup.properties`, in the format `jar.name=level`. The core system bundles have levels below 50, where as user bundles have levels greater than 50.

Level	Behavior
1	A 'cold' standby instance. Core bundles are not loaded into container. Slaves will wait until lock acquired to start server.
<50	A 'hot' standby instance. Core bundles are loaded into the container. Slaves will wait until lock acquired to start user level bundles. The console will be accessible for each slave instance at this level.
>50	This setting is Not recommended as user bundles will be started.

To use this feature the following must be set on each system in the master/slave setup:

- `$KARAF_HOME/etc/system.properties` file updated to reflect the below entries.

```
karaf.lock=true
karaf.lock.level=50
karaf.lock.delay=10
```

Please note that when using a 'hot' spare on the same host the jmx remote port will need to be configured to a unique port to avoid bind conflicts. The servicemix start script can be edited to include the following:

```
DEFAULT_JAVA_OPTS="-server $DEFAULT_JAVA_OPTS  
-Dcom.sun.management.jmxremote.port=1100  
-Dcom.sun.management.jmxremote.authenticate=false"
```

JDBC LOCKING

The JDBC locking mechanism is intended for failover configurations where instances exist on separate machines. In this deployment the master instance holds a lock on a servicemix locking table hosted on a database. If the master loses this lock then an awaiting slave process may gain access to the locking table, then fully start its container. The former master upon detection of lock loss will switch run levels as configured by lock level.

To use this feature the following must be set on each system in the master/slave setup:

- Classpath updated to include JDBC driver.
- \$KARAF_HOME/etc/system.properties file updated to reflect the below entries.
- \$KARAF_HOME/bin/karaf updated to have unique jmx remote port set if instances reside on same host.

```
karaf.lock=true  
karaf.lock.class=org.apache.felix.karaf.main.DefaultJDBCLock  
karaf.lock.level=50  
karaf.lock.delay=10  
karaf.lock.jdbc.url=jdbc:derby://dbserver:1527/sample  
karaf.lock.jdbc.driver=org.apache.derby.jdbc.ClientDriver  
karaf.lock.jdbc.user=user  
karaf.lock.jdbc.password=password  
karaf.lock.jdbc.table=KARAF_LOCK  
karaf.lock.jdbc.clustername=karaf  
karaf.lock.jdbc.timeout=30
```

Note:

- Will fail if jdbc driver is not on classpath.
- The database name "sample" will be created if it does not exist on the db.
- First Karaf instance to acquire the locking table is the master instance.
- If connection to the DB is lost then the master instance will attempt to gracefully shutdown, allowing a slave instance to become master when the DB service is restored. The former master will require manual restart.

The Container Level locking mechanism allows bundles to be loaded into the slave kernel instance in order to provide faster failover performance. The Container Level refers to the starting priority assigned to each bundle in the OSGI container. These start levels are specified

in \$KARAF_HOME/etc/startup.properties, in the format jar.name=level. The core system bundles have levels below 50, where as user bundles have levels greater than 50.

Level	Behavior
1	A 'cold' standby instance. Core bundles are not loaded into container. Slaves will wait until lock acquired to start server.
<50	A 'hot' standby instance. Core bundles are loaded into the container. Slaves will wait until lock acquired to start user level bundles. The console will be accessible for each slave instance at this level.
>50	This setting is Not recommended as user bundles will be started.

7. Optional Features

- 7.1. Enabling Colorized Console Output On Windows

7.1. Enabling Colorized Console Output On Windows

The default Karaf installation does not produce colorized console output on Windows like it does on Unix based systems. To enable it, you must install LGPL licensed library JNA. This can be done using a few simple commands in the Karaf console:

You first need to install the JNA library:

```
osgi:install wrap:mvn:http://download.java.net/maven/2!net.java.dev.jna/jna/3.1.0
```

Next you need either restart karaf or you run the following Karaf commands to refresh the Karaf Console:

```
osgi:list | grep "Apache Felix Karaf :: Shell Console"
```

Take note of the ID of the bundle, in my case it was 14 and then run:

```
osgi:refresh 14
```